

## Technical Data Sheet

### Product Feature:

GURAM® is TPE compounding produced by KESUN. It's safe, recyclable and environmentally friendly with soft touch and good elasticity and also excellent pigmentation, as well as good weather resistance. It is used in injection, extrusion, calendaring and blow molding with good processing stability. It has wide applications in daily necessities, sports accessories, toys, decorative materials, auto parts and other applications.

EPK7079NLS-J02 is TPE compounding based on Styrene Butadiene Copolymer, it's no odor, has soft touch, smooth surface and excellent elasticity, Specifications for injection molding developed for high-end products.

### Product Properties:

Typical Properties	Test Method	Units	Typical values*
Form	N/A	-	Particle
Color	N/A	-	Natural
Hardness	ASTM D-2240	shore A	70
Specific Gravity	ASTM D-792	g/cm <sup>3</sup>	0.99
Tensile Stress	ASTM D-412	MPa	6
Tear Strength	ASTM D-624	N/mm	25
Ultimate Elongation	ASTM D-412	%	600

\*Above data for reference only.

### Kunshan Kesun Polymer Co., Ltd

Add: No 108 Jinmao Road, Zhoushi Town, Kunshan City, Jingshu, China

Tel: 0512-55173009

Web: [www.kesuntpe.com](http://www.kesuntpe.com)

PC: 215300

Fax: 0512-57784279

E-mail: [info@kesuntpe.com](mailto:info@kesuntpe.com)


## Processing Guidelines:

### Injection Moulding Guidelines

Mold Shrinkage: 0.015~0.025 inch/inch  
Injection Speed: Medium - Fast  
Injection Pressure: Medium - Fast  
Back Pressure: Low - Medium  
Holding Pressure: Sufficient to pack the mould  
Cooling: Can be demoulded when parts have sufficiently cooled

Barrel Temperature (°C)

130-170 150-190 160-200 160-200 15-50

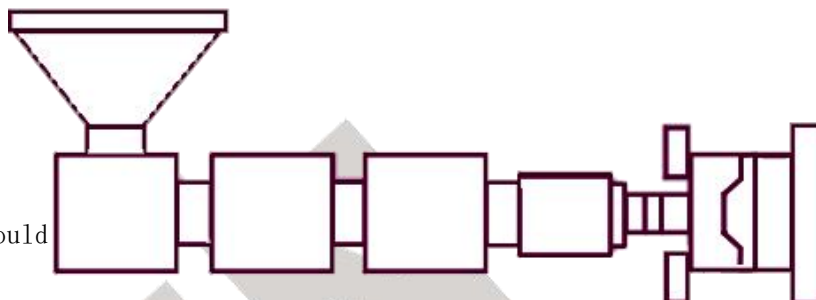

### Extrusion Guidelines

L/D Ratio: 20:1 - 25:1  
Compression Ratio: 2.5 - 3.0  
Breaker Plate/Screen: Both should be used  
Draw Down: 5 - 10%  
Cooling: Cold water bath

Barrel Temperature (°C)

150-170 170-200 180-210 180-210 180-210



## Processing Notes:

- A. Normally need not drying, if absorbed moisture, pre-drying the particles for 2 to 4 hours at 80°C.
- B. Cleaning the screw and die with PP or PE before and after processing.
- C. The gate and runner can be recycled, but less than 15%.
- D. PE/EVA base color masterbatch is better for coloring.

The information and suggestions contained in this bulletin are to the best of our knowledge, accurate and reliable, but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of

## Kunshan Kesun Polymer Co., Ltd

Add: No 108 Jinmao Road, Zhoushi Town, Kunshan City, Jingshu, China

Tel: 0512-55173009

Web: [www.kesuntpe.com](http://www.kesuntpe.com)

PC: 215300

Fax: 0512-57784279

E-mail: [info@kesuntpe.com](mailto:info@kesuntpe.com)

# KESUN

GURAM®

EPK7079NLS-J02

## Technical Data Sheet

---

such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's suggestions. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.

KESUN  
科信高分子

---

**Kunshan Kesun Polymer Co., Ltd**

Add: No 108 Jinmao Road, Zhoushi Town, Kunshan City, Jingshu, China

Tel: 0512-55173009

Web: [www.kesuntpe.com](http://www.kesuntpe.com)

PC: 215300

Fax: 0512-57784279

E-mail: [info@kesuntpe.com](mailto:info@kesuntpe.com)